

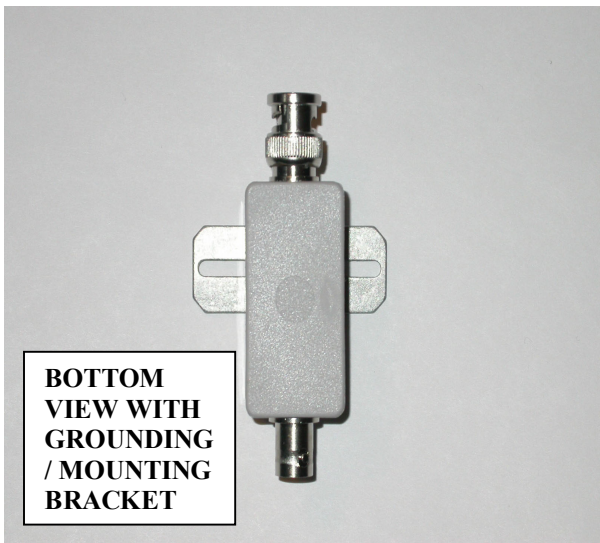


**BRAVO COMMUNICATIONS, INC.
SURE/FIRE® MODEL BNC/LAN RF COAXIAL PROTECTOR**

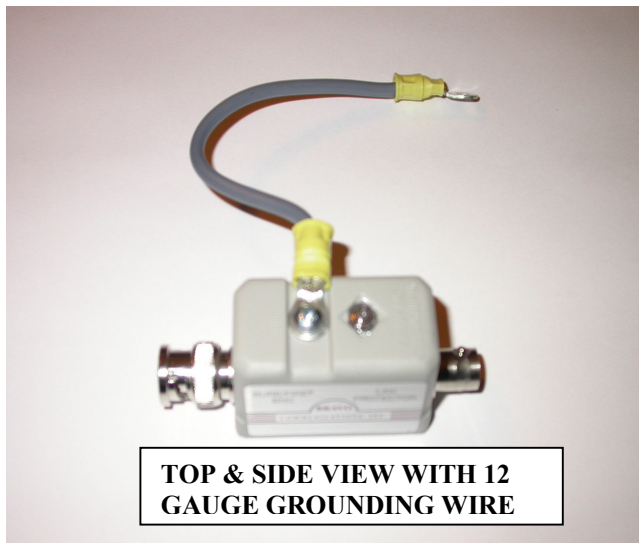

FEATURES

- ◆ Up to 2.5 GHz frequency
- ◆ In-Line "BNC" Series Male/Female RF Protector
- ◆ Negligible network loading effect at less than 3 pf capacitance and less than .1 db insertion loss
- ◆ DC breakdown voltage is nominal @ ± 90 volts (other voltages are available)
- ◆ Maximum impulse discharge current (8/20 us) is 40K amps
- ◆ Impulse Life (10/1000 us) @ 500A is 100 times
- ◆ Performs 50 ohm or 75 ohm impedance characteristic
- ◆ UL 94-V-0 fireproof injection molded plastic enclosure
- ◆ Protects the active center conductor with an isolated ground screw terminal (GND). Ground the Bravo Protector with either a 12 AWG grounding wire or by attaching a metal grounding bar for mounting RF Protector directly to a flat surface or to a prepared grounding plate surface. Note: Specify if a ground wire or grounding bar is desired with each unit ordered (included). Note: Protection Test Light Feature Not activated on BNC models.
- ◆ Operating Temperature is -40 to +65 degrees C

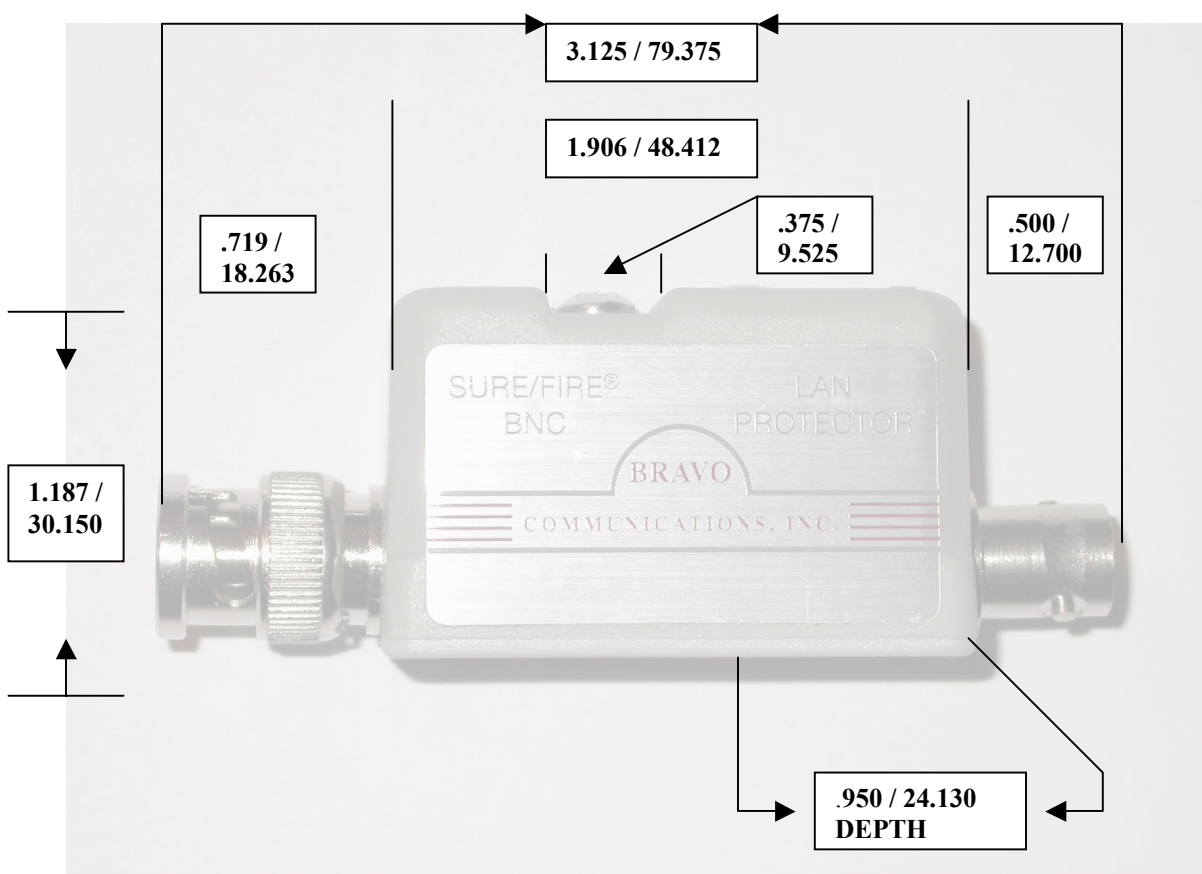

Note: All dimensions are specified as inches / millimeters.

**BRAVO COMMUNICATIONS, INC.
3463 MEADOWLANDS LN
SAN JOSE, CA 95135 U.S.A.**

PART NUMBER: BNC/LAN RF