
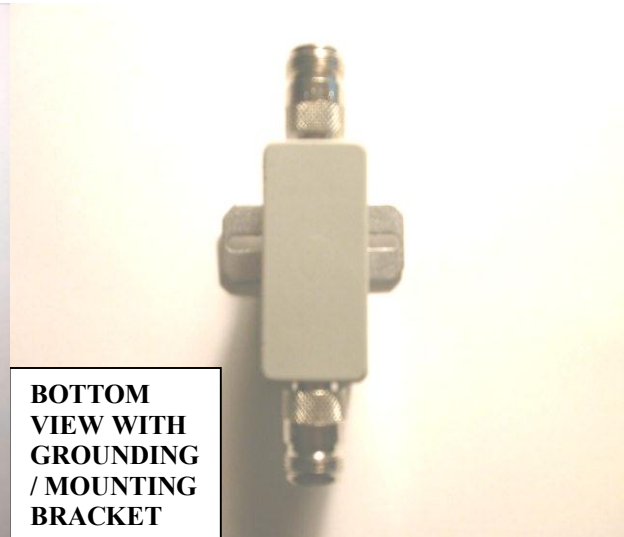


**BRAVO COMMUNICATIONS, INC.  
SURE/FIRE® MODEL F/LANRF F/F COAXIAL PROTECTOR**

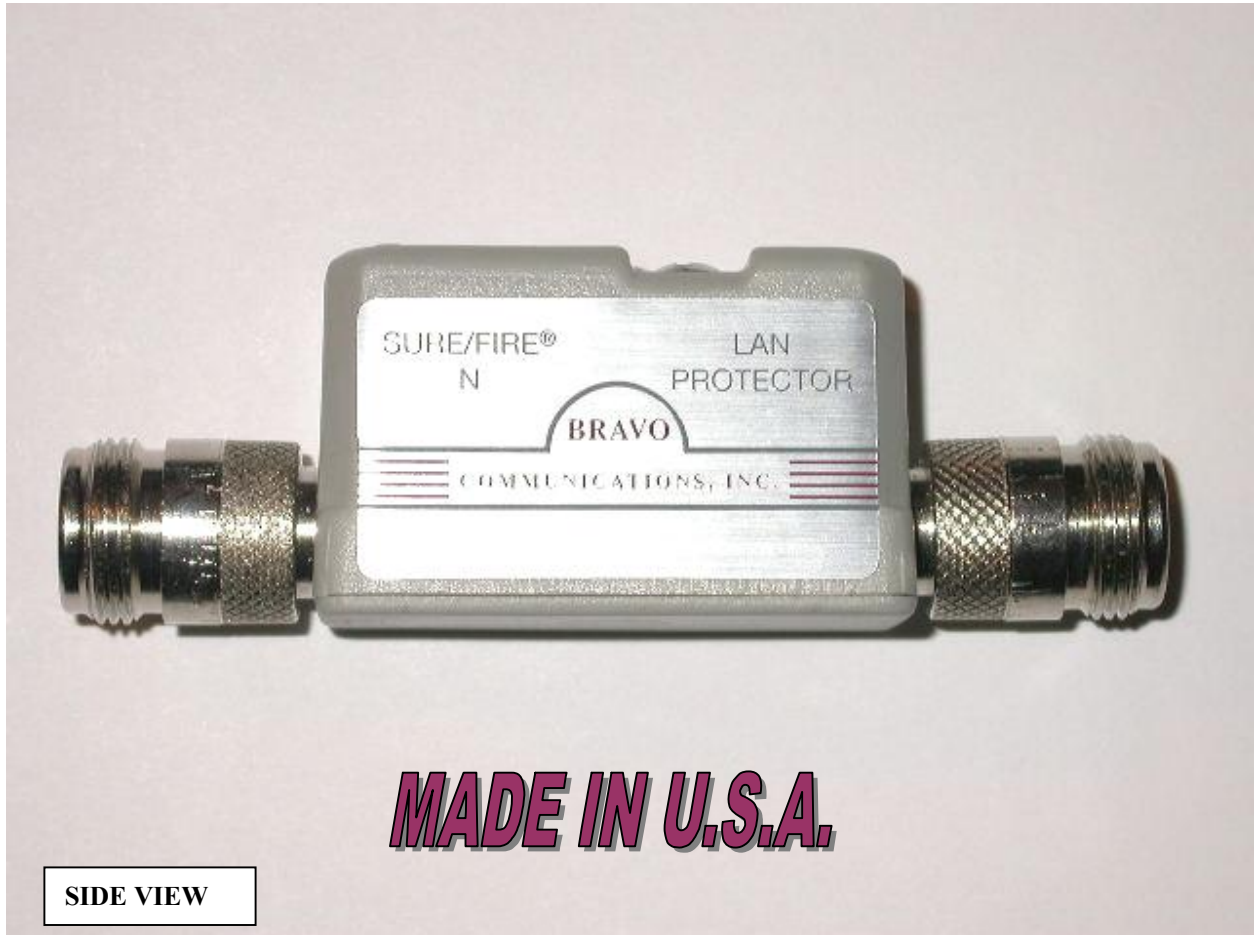

**Note: All “F” Series Connector Models are same as shown in the above photos except F connectors are used versus N style .**

**FEATURES**

- ◆ Up to 3.0 GHz frequency
- ◆ In-Line "F" Series Female/Female RF Protector ( Male/Female also available as P/N F/LANRF )
- ◆ Negligible network loading effect at less than 3 pf capacitance and less than .1 db insertion loss
- ◆ DC breakdown voltage is nominal @  $\pm 90$  volts ( other voltages are available )
- ◆ Maximum impulse discharge current (8/20 us) is 40K amps
- ◆ Impulse Life (10/1000 us) @ 500A is 100 times
- ◆ Performs 50 ohm or 75 ohm impedance characteristic
- ◆ UL 94-V-0 fireproof injection molded plastic enclosure
- ◆ Protects the active center conductor with an isolated ground screw terminal (GND). Ground the Bravo Protector with either a 12 AWG grounding wire or by attaching a metal grounding bar for mounting RF Protector directly to a flat surface or to a prepared grounding plate surface. Note: Specify if a ground wire or grounding bar is desired with each unit ordered (included).
- ◆ Operating Temperature is -40 to +65 degrees C

**BRAVO COMMUNICATIONS, INC.  
3463 MEADOWLANDS LN  
95135 U.S.A.**

**PART NUMBER: F/LANRF ( Male/Female )  
PART NUMBER: F/LANRF F/F ( Female/Female )**